


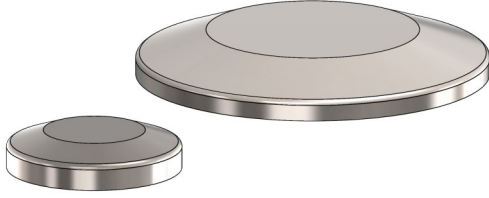


Tri-Clamp Fittings

TC Blanks, Universal, Metric Size

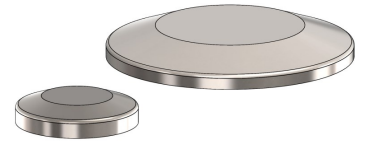

FERRULE PROFILE
FOR SIZES WITH A 25.4mm
FLG OD ONLY

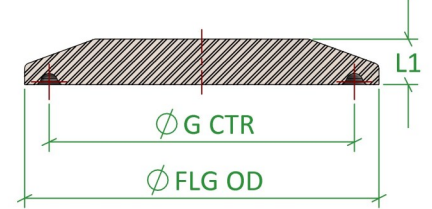

FERRULE PROFILE
FOR SIZES WITH A 34.0mm
FLG OD & ABOVE

Standard	DIN32676-A Universal Size	Certification	EN10204 3.1
Connections	TC Fitting	Associated Parts	TC, Ferrule TC Clamp, TC Gasket
Material	316L Stainless Steel EN 1.4404	Associated Standards	All TC Standards
Surface Finish	0.8Ra Internal Wetted Surfaces	Options	Bored Holes, Duplex Materials
Remarks	TC Blanks Are Universal In Size. All Sizes Transferable Between Imperial & Metric, Compare Flange OD Dimension		

TC Fittings, TC Blank, Metric Size / Suits DIN32676-A

Size (DN)	FLG OD (mm)	G CTR (mm)	L1 (mm)	Part Code
DN 6/8	25.40	20.30	5.60	CB.DNA.D006-D008.6
DN10/15/20	34.00	27.50	6.00	CB.DNA.D010-D020.6
DN25/32/40	50.50	43.50	7.00	CB.DNA.D025-D040.6
DN50	64.00	56.50	7.00	CB.DNA.D050.6
DN65	91.00	83.50	7.00	CB.DNA.D065.6
DN80	106.00	97.00	7.00	CB.DNA.D080.6
DN100	119.00	110.00	9.00	CB.DNA.D100.6
DN125	155.00	146.00	10.00	CB.DNA.D125.6
DN150	183.00	174.00	10.00	CB.DNA.D150.6
DN200	233.50	225.00	10.00	CB.DNA.D200.6
DN250	268.00	258.00	10.00	CB.DNA.D250.6
DN300	319.00	308.00	10.00	CB.DNA.D300.6

Published Data Is Given in Good Faith. We Reserve the Right To, Without Warning Change the Dimensions When Not In Conflict With The Published Standard

Flowsource Process Fittings Ltd

Unit 4 Marrtree Business Park, Cedar Road, Sowerby, Thirsk, North Yorkshire, YO7 3FF, United Kingdom
[T] 01535 274 316 - [e] sales@flowsourcepf.com - [w] www.flowsourcepf.com

FLOWSOURCE
PROCESS FITTINGS