
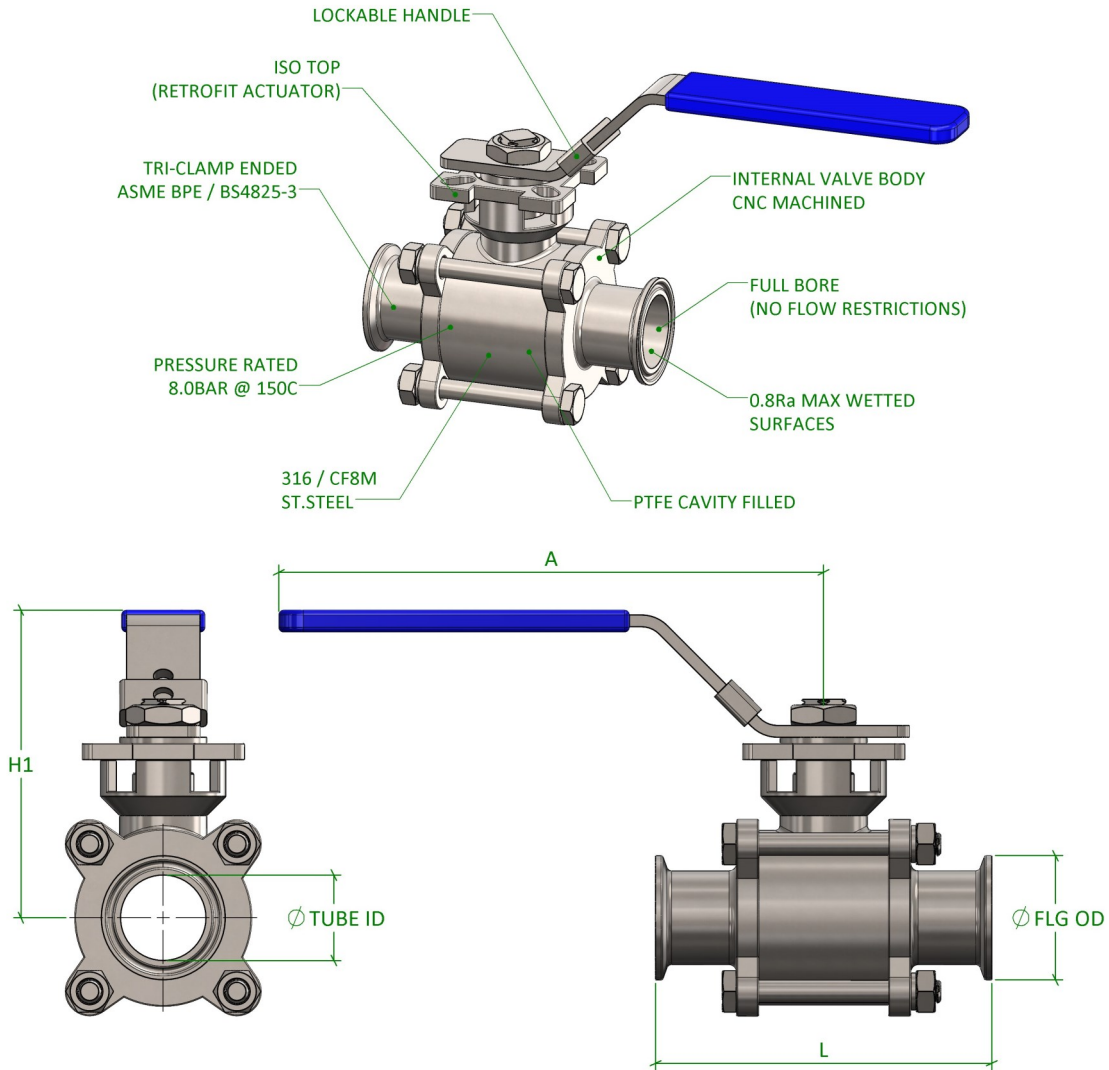


Ball Valves

3-Piece Full Bore, Manual, Clamp Ended



Standard	BS / 3A—Imperial	Certification	EN10204 3.1, FDA for Seal
Connections	Clamp End X Clamp End	Associated Parts	BS4825-3, All Imperial Clamp Ended Fittings
Material	316L Body, Handle & Fasteners / PTFE Filled	Associated Standards	BS4825-3, 3A
Surface Finish	0.8Ra Internal Wetted Surfaces	Options	Air Actuated Head Available
Remarks	Weld Ended & Alternative Sizes Available Upon Request		

Ball Valve, 3-Piece Full Bore, Manual, Clamp Ended, 316 St.St Body & Handle / PTFE Cavity Filled

Size (inch)	FLG OD (mm)	TUBE ID (mm)	ØA (mm)	H1 (mm)	L (mm)	Max Op. Pressure (bar@150C)	Part Code
0.50"	25.4	9.4	131	64	91	10	BLV.MAN.CC.0050.6
0.75"	25.4	15.8	131	68	103	10	BLV.MAN.CC.0075.6
1.00"	50.5	22.1	169	86	114	10	BLV.MAN.CC.0100.6
1.50"	50.5	34.8	213	123	137	10	BLV.MAN.CC.0150.6
2.00"	64.0	47.5	213	123	153	10	BLV.MAN.CC.0200.6
2.50"	77.5	60.2	213	140	167	8	BLV.MAN.CC.0250.6
3.00"	91.0	72.9	320	165	192	8	BLV.MAN.CC.0300.6
4.00"	119.0	97.4	320	177	240	8	BLV.MAN.CC.0400.6
6.00"	167.0	97.4	490	205	378	8	BLV.MAN.CC.0600.6

Published Data Is Given in Good Faith. We Reserve the Right To, Without Warning Change the Dimensions When Not In Conflict With The Published Standard

Flowsource Process Fittings Ltd

Unit 4 Marrtree Business Park, Cedar Road, Sowerby, Thirsk, North Yorkshire, YO7 3FF, United Kingdom
 [T] 01535 274 316 - [e] sales@flowsourcepf.com - [w] www.flowsourcepf.com

FLOWSOURCE
PROCESS FITTINGS